



Quasi-Static Compression Performance Solef® PVDF 80 111: Expanded PVDF

ISO 844, DIN 53 421


Grade: 80111

Tested density: 110 g/l

Test Specifications:

Compression speed: 5 mm/min

Sample shape: Cube 50 x 50 x 50 mm

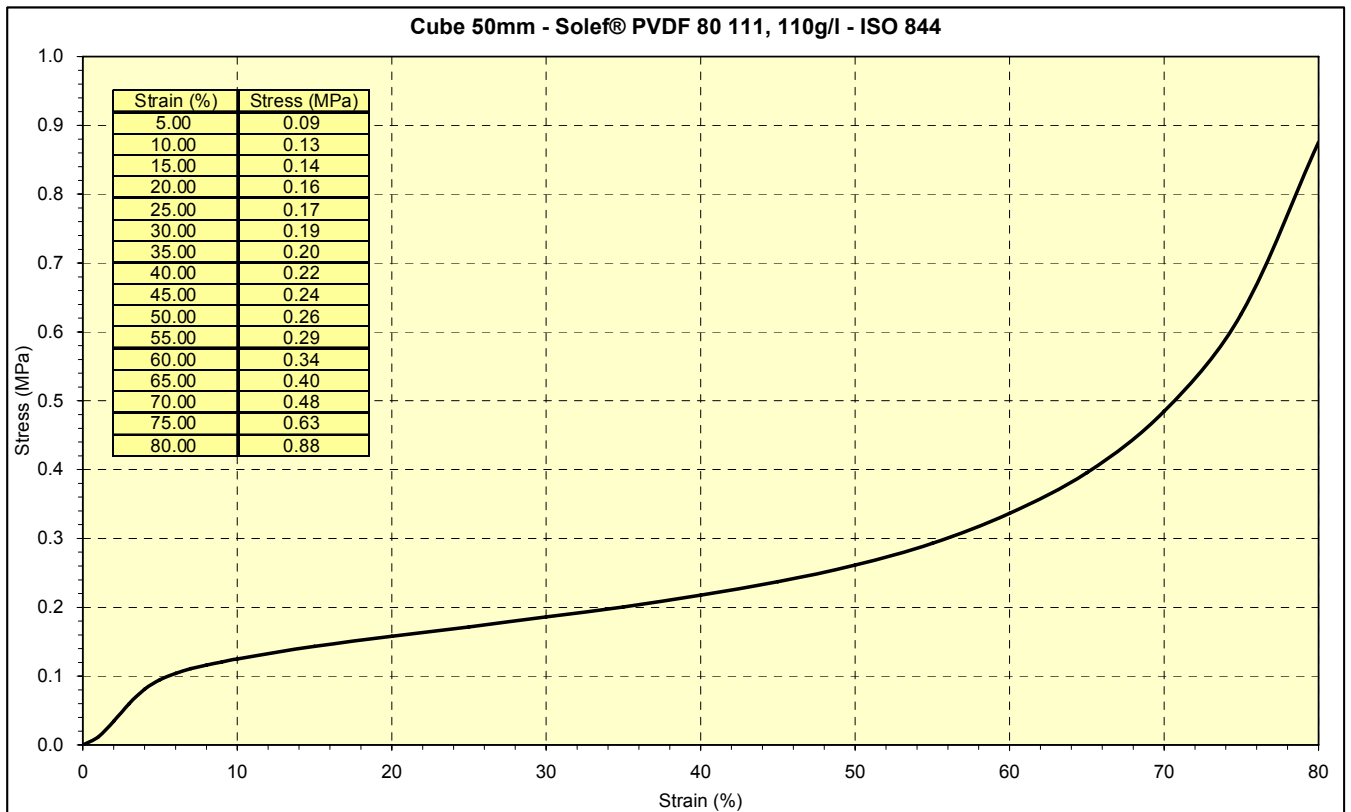

The present results concern only the composition of Solef® PVDF 80 000 Series Expanded PVDF (Poly Vinylidene Fluoride) and do not guarantee the compliance of final articles made of that product.

Document reference: **Solef® PVDF 80 111, compressive strength@110 g/l (ISO844)** Bulletin: 126-PVDF Version: 02

SOLEF® is a Registered Trademark of Solvay S.A

The information contained herein is provided as a convenience to JSP's customers and reflects the results of internal laboratory tests conducted on samples of Solef® PVDF 80 000 Series (Expanded PVDF) produced by JSP. While all reasonable care has been taken to ensure that this information is accurate as of the date of issue, JSP does not represent, warrant or otherwise guarantee, expressly or impliedly, the suitability, accuracy, reliability or completeness of the information.